

# Sliding Wir

#### **HEATSEAL® DELUXE PACKAGE** -ARGON GAS

Double Pane Glass Unit Solid Composite, No Foam Without Grids



#### Okna Windows & Doors

215 - 788 - 7000

SL7520 2 - Lite Slider Window (SL7520) Cellular Composite Frame • 3/4" Insulated Glass
Unit • Low – E High Perf. Glass with Argon Gas Horizontal Slider Window 0KW - K - 046 - 00002 - 00001

#### **ENERGY PERFORMANCE RATINGS**

U - Factor (U.S./I - P)

Solar Heat Gain Coefficient

0.260.29

#### ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

Air Leakage (U.S./I - P) ≤ 0.3



**ENERGY STAR®** Certified in All 50 States

#### **HEATSEAL® SUPER DELUXE XR11** -ARGON GAS

Triple Pane Glass Unit Solid Composite, No Foam Without Grids



#### Okna Windows & Doors

215 - 788 - 7000

SL7520 2 - Lite Slider Window (SL7520) Cellular Composite Frame • 1 1/8" Insulated Glass
Unit • Triple Low – E IG + Argon Gas Horizontal Slider Window

#### **ENERGY PERFORMANCE RATINGS**

U - Factor (U.S./I - P)

Solar Heat Gain Coefficient

0.17

0.25

ADDITIONAL PERFORMANCE RATINGS Visible Transmittance

Air Leakage (U.S./I - P)  $\leq 0.3$ 



**ENERGY STAR®** Certified in All 50 States

#### **HEATSEAL® SUPER DELUXE XR12** -KRYPTON GAS

Triple Pane Glass Unit Solid Composite, No Foam Without Grids



#### Okna Windows & Doors

215 - 788 - 7000

SL7520 2 - Lite Slider Window (SL7520) Cellular Composite Frame = 1 1/8" Insulated Glass
Unit = Triple Low - E iG + Krypton Gas Horizontal Slider Window OKW - K - 846 - 8888 - 8888

#### **ENERGY PERFORMANCE RATINGS**

U - Factor (U.S./I - P)

Solar Heat Gain Coefficient

0.15

0.25

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

Air Leakage (U.S./I - P)  $\leq 0.3$ 

other etipolates that these ratings conform to applicable NFRC procedures for determining whole performance. NFRC ratings are determined for a fixed set of anylonemental conditions and product size. NFRC does not recommend any product and other one variant has usballing of any for any specific use. Consoli Manufacturer's literature for other product performance intermation which are the product of the product of the product performance intermation which are the product of the product of the product performance intermation which are the product of the product of the product performance intermation where the product of the product of the product of the product performance intermation where the product of the pr



**ENERGY STAR™** Certified in All 50 States

#### **HEATSEAL® SUPER DELUXE XR17** -KRYPTON/ARGON GAS

Triple Pane Glass Unit Solid Composite, No Foam Without Grids



#### Okna Windows & Doors

215 - 788 - 7000

SL7520 2-Lite Slider Window (SL7520) Cellular Composite Frame \* 1 1/8" Insulated Glass Unit \* Triple Low - E IG + Blend Gas Horizontal Slider Window OKW - K - 046 - 00038 - 00001

#### **ENERGY PERFORMANCE RATINGS**

U - Factor (U.S./I - P) Solar Heat Gain Coefficient 0.25 0.15

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

Air Leakage (U.S./I - P)

 $\leq 0.3$ 

rer alpulates that these ratings conform to applicable NFRC procedures for determining whole offermance. NFRC ratings are determined for a fixed set of environmental conditions and discut See. NFRC does not recommend sky, product and does not warrant the substitling of any any specific use. Consult Manufacturer is literature for other product performance information when the consultance of the condition of the consultance o



**ENERGY STAR®** Certified in All 50 States

#### **HEATSEAL® SUPER DELUXE XR172** -KRYPTON/ARGON GAS

Triple Pane Glass Unit Solid Composite, No Foam Without Grids



CERTIFIED

#### Okna Windows & Doors

215 - 788 - 7000

SL7520 2-Lite Slider Window (SL7520) Cellular Composite Frame • 1 1/8" Insulated Glass
Unit • Triple Low — EIG + Blend Gas Horizontal Slider Window OKW -- K -- 046 -- 00037 -- 00001

**ENERGY PERFORMANCE RATINGS** U - Factor (U.S./I - P) Solar Heat Gain Coefficient

0.17

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

Air Leakage (U.S./I - P)

0.41

 $\leq 0.3$ 

curer elipulates that these ratings conform to applicable NFRC procedures for determining whole performance. NFRC ratings are determined for a fixed set of environmental conditions and product size. NFRC closes and resonmental any product and deem on warrant the subshifty of any for any specific use. Consult Manufacturer's literature for other product performance information, warfic any of the product of the product of the product performance information.



ENERGY STAR® Certified in All 50 States

## **SUNSEAL DELUXE PACKAGE**

Double Pane Glass Unit Without Grids



### Okna Windows & Doors

215 - 788 - 7000

SL7520 2 - Lite Slider Window (SL7520) Cellular Composite Frame = 3/4" Insulated Glass Unit = Sun Seal High Perf. Glass + Argon Gas Horizontal Slider Window

#### **ENERGY PERFORMANCE RATINGS**

ADDITIONAL PERFORMANCE RATINGS

U - Factor (U.S./I - P)

Solar Heat Gain Coefficient

0.25

0.21

Visible Transmittance

Air Leakage (U.S./I - P)

 $\leq 0.3$ 




**ENERGY STAR®** Certified in All 50 States

hen you purchase a window or patio door that is advertised as the most energy efficient, you want to be sure the claims are based on facts, certified by a truly independent and objective authority. Their unbiased test results educate purchasers allowing them to make a more educated choice.



The AAMA Certification Program is the only program in the window and door industry that requires that components used in the finished window and door assembly pass their own set of performance tests. The program also requires the use of AAMA-accredited certification agencies, such as Keystone Certifications Inc., so that tests are performed by qualified, experienced professionals using properly calibrated equipment. Also, there are two surprise manufacturing plant inspections every year that offer added quality assurance that translates to peace of mind.

If you demand windows and doors that meet stringent performance standards, just look for the AAMA/ Keystone Certification Label which tells you that a sample of the unit passed required performance tests for resistance to air leakage, water penetration and wind pressure. Starmark Evo is using Keystone Certifications Inc. for AAMA testing and ratings. For more information on our window testing, go to www.keystonecerts.com.

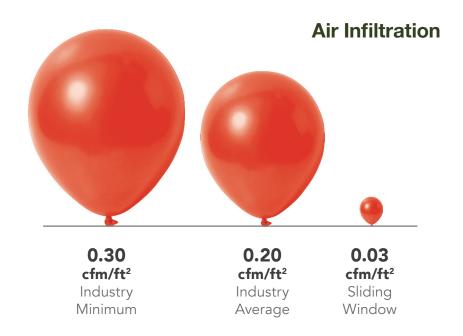

Sliding Window (SL 7520) Structural Performance			
Numbers based off of tested window size: 63" x 44"	Industry Minimum	Double Glazed	Triple Glazed
AAMA Rating performance grade	R15	R60	R60
Structural Integrity  Design Pressure (DP)  Wind load the window can withstand before breaking	DP 15 (94 mph)	DP 70	DP 80
<b>Air Infiltration (cfm/ft²)</b> at speed of 25mph	0.30	0.03	0.03
Water Penetration (mph) 8" per hour	33	59	59

The results are based on a tested window sample by AAMA testing window guidelines. Title of Test & Method: Air Infiltration - ASTM E 283 75 PA - (1.6 psf) 25 mph

**The ENERGY STAR Most Efficient** designation is an extension of the ENERGY STAR® brand and is designed to recognize and advance the most efficient products among those that qualify for the ENERGY STAR. This recognition is offered for specific categories and awarded for a specific year. The goal of this effort is to encourage new, more energy-efficient products into the market more quickly by targeting early adopters.

Each year, EPA will establish criteria for specific product categories to earn Most Efficient recognition. Products that are recognized as ENERGY STAR Most Efficient must already qualify for the ENERGY STAR label.



OKNA Windows proudly displays ENERGY STAR MOST EFFICIENT on our products.