



600 Series by OKNA Windows

SL620

## THERMAL PERFORMANCE PACKAGES

### HEATSEAL<sup>®</sup> DELUXE

VINYL FRAME • FOAM FILL • LOW-E GLASS  
3/4" DOUBLE PANE IGU • ARGON GAS (90)

No Grids

 <b>OKNA Windows &amp; Doors</b> 215-788-7888 (SL620dx) Vinyl Frame Foam Filled • 3/4" Insulated Glass Unit • Low-E High Perf. Glass with Argon Gas Horizontal Slider Window OKW-K-39-00039-00001	
<b>ENERGY PERFORMANCE RATINGS</b>	
U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
<b>0.28</b>	<b>0.28</b>
<b>ADDITIONAL PERFORMANCE RATINGS</b>	
Visible Transmittance	Air Leakage (U.S./I-P)
<b>0.51</b>	<b>≤ 0.3</b>
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org</small>	

### HEATSEAL<sup>®</sup> TRIPLE DELUXE XR15

VINYL FRAME • FOAM FILL • LOW-E GLASS  
1 1/16" TRIPLE PANE IGU • ARGON GAS (90)

No Grids

 <b>OKNA Windows &amp; Doors</b> 215-788-7888 (SL620dx) Vinyl Frame Foam Filled • 1 1/16" Insulated Glass Unit • Triple Low-E • Argon Gas Horizontal Slider Window OKW-K-39-00039-00001	
<b>ENERGY PERFORMANCE RATINGS</b>	
U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
<b>0.20</b>	<b>0.24</b>
<b>ADDITIONAL PERFORMANCE RATINGS</b>	
Visible Transmittance	Air Leakage (U.S./I-P)
<b>0.40</b>	<b>≤ 0.3</b>
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org</small>	

### HEATSEAL<sup>®</sup> TRIPLE DELUXE XR10



VINYL FRAME • FOAM FILL • LOW-E GLASS  
1 5/16" TRIPLE PANE IGU • KRYPTON GAS (90)

No Grids

 <b>OKNA Windows &amp; Doors</b> 215-788-7888 (SL620dx) Vinyl Frame Foam Filled • 1 5/16" Insulated Glass Unit • Triple Low-E • Krypton Gas Horizontal Slider Window OKW-K-39-00039-00001	
<b>ENERGY PERFORMANCE RATINGS</b>	
U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
<b>0.18</b>	<b>0.24</b>
<b>ADDITIONAL PERFORMANCE RATINGS</b>	
Visible Transmittance	Air Leakage (U.S./I-P)
<b>0.40</b>	<b>≤ 0.3</b>
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org</small>	



QUALIFICATION:

-  Northern
-  North-Central



QUALIFICATION:

-  Northern
-  North-Central

The **ENERGY STAR<sup>®</sup> Most Efficient** designation is an extension of the ENERGY STAR<sup>®</sup> brand and is designed to recognize and advance the most efficient products among those that qualify for the ENERGY STAR<sup>®</sup>. This recognition is offered for specific categories and awarded for a specific year. The goal of this effort is to encourage new, more energy-efficient products into the market more quickly by targeting early adopters.

Each year, EPA will establish criteria for specific product categories to earn Most Efficient recognition. Products that are recognized as ENERGY STAR<sup>®</sup> Most Efficient must already qualify for the ENERGY STAR<sup>®</sup> label.



OKNA Windows products within this series have been recognized as the **Most Efficient of ENERGY STAR 2025**.

### SUNSEAL<sup>®</sup>

VINYL FRAME • HIGH PERF. GLASS  
3/4" DOUBLE PANE IGU • ARGON GAS (90)

No Grids

 <b>OKNA Windows &amp; Doors</b> 215-788-7888 (SL620) Vinyl Frame • 3/4" Insulated Glass Unit • Gas Seal High Perf. Glass • Argon Gas Horizontal Slider Window OKW-K-39-00048-00001	
<b>ENERGY PERFORMANCE RATINGS</b>	
U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
<b>0.29</b>	<b>0.20</b>
<b>ADDITIONAL PERFORMANCE RATINGS</b>	
Visible Transmittance	Air Leakage (U.S./I-P)
<b>0.40</b>	<b>≤ 0.3</b>
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org</small>	



QUALIFICATION:

-  Southern

### SUNSEAL<sup>®</sup> DELUXE

VINYL FRAME • FOAM FILL • HIGH PERF. GLASS  
3/4" DOUBLE PANE IGU • ARGON GAS (90)

No Grids

 <b>OKNA Windows &amp; Doors</b> 215-788-7888 (SL620dx) Vinyl Frame Foam Filled • 3/4" Insulated Glass Unit • Gas Seal High Perf. Glass • Argon Gas Horizontal Slider Window OKW-K-39-00048-00001	
<b>ENERGY PERFORMANCE RATINGS</b>	
U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
<b>0.27</b>	<b>0.20</b>
<b>ADDITIONAL PERFORMANCE RATINGS</b>	
Visible Transmittance	Air Leakage (U.S./I-P)
<b>0.40</b>	<b>≤ 0.3</b>
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org</small>	



QUALIFICATION:

-  South-Central
-  Southern

## THERMAL PERFORMANCE PACKAGES

	U-Value	SHGC	VT	Condensation Resistance
<b>HEATSEAL®</b>	<b>0.29</b>	<b>0.28</b>	<b>0.51</b>	<b>63</b>
<b>HEATSEAL® DELUXE</b>	<b>0.28</b>	<b>0.28</b>	<b>0.51</b>	<b>64</b>
<b>HEATSEAL® TRIPLE DELUXE XR15</b> (1 1/16" - Argon Gas)	<b>0.20</b>	<b>0.24</b>	<b>0.40</b>	<b>75</b>
<b>HEATSEAL® TRIPLE DELUXE XR10</b> (15/16" - Krypton Gas)	<b>0.18</b>	<b>0.24</b>	<b>0.40</b>	<b>74</b>
<b>SUNSEAL®</b>	<b>0.29</b>	<b>0.20</b>	<b>0.40</b>	<b>63</b>
<b>SUNSEAL® DELUXE</b>	<b>0.27</b>	<b>0.20</b>	<b>0.40</b>	<b>64</b>

Numbers are based off of windows tested without grids. For windows with grids, please contact your certified dealer to obtain thermal performance numbers.

When you purchase a window or patio door that is advertised as the most energy efficient, you want to be sure the claims are based on facts, certified by a truly independent and objective authority. Their unbiased test results allow homeowners to make a more educated choice.

All OKNA windows and doors meet rigorous fenestration standards.

Certification is performed by **The Keystone Certification Program** that is ANSI-accredited to ensure that our products are manufactured as represented by their certifications, which are based on tests performed by accredited laboratories in accordance with the AAMA/WDMA/CSA 101/IS2/A440 – North American Fenestration Standard (NAFS). The NAFS standard defines a rating scale for fenestration product performance, and requires that components used in window & door assemblies also meet stringent component standards. Certification includes annual inspections to ensure the factory quality management system also meets rigid standards - that translates to homeowner peace of mind.




**OKNA Windows**  
400 Crossings Drive  
Bristol, PA 19007  
P **215-788-7000**  
F **215-781-1166**  
[oknawindows.com](http://oknawindows.com)

## STRUCTURAL PERFORMANCE

	Industry Minimum	OKNA SL620	Comparison to Industry Minimum
<b>AAMA Rating</b> Residential Grade Performance for air/water/structural.	R15	<b>R40</b>	
<b>Air Infiltration (cfm/ft2)</b> at speeds of 25mph.	0.3	<b>0.08</b>	<b>375% better</b>
<b>Water Penetration (mph)</b> 8" per hour.	33	<b>57</b>	<b>73% better</b>
<b>Structural Integrity Design Pressure (DP)</b> Wind (mph) durability before breaking.	94	<b>153</b>	<b>63% better</b>

## Air Infiltration

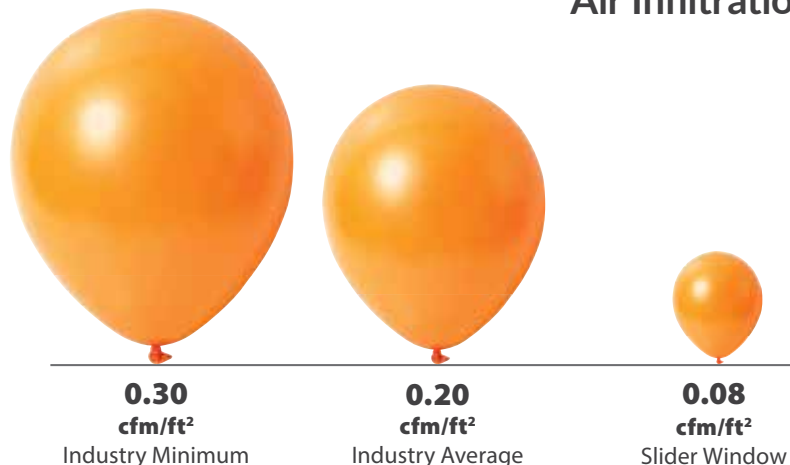

The results are based on a tested window sample by AAMA testing window guidelines. Title of Test & Method: Air Infiltration - ASTM E 283 75 PA - (1.6 psf) 25 mph